

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
18 September 2003 (18.09.2003)

PCT

(10) International Publication Number  
WO 03/076736 A1

(51) International Patent Classification<sup>7</sup>: E04B 1/84,  
E01F 8/00, B28B 3/20, 3/26

(21) International Application Number: PCT/EP02/03045

(22) International Filing Date: 14 March 2002 (14.03.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US):  
WIENERBERGER BRICKS N.V. [BE/BE]; Ter Bede  
Business Center, Kapel ter Bede 68, B-8500 Kortrijk (BE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): VAN REETH, Rudy  
[BE/BE]; Puilaarsteenweg 149, B-2870 Puurs (BE).

(74) Agents: OSTYN, Frans et al.; K.O.B. NV, Kennedypark  
51 c, B-8500 Kortrijk (BE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,  
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent  
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,  
NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ACOUSTIC CONSTRUCTION ELEMENT

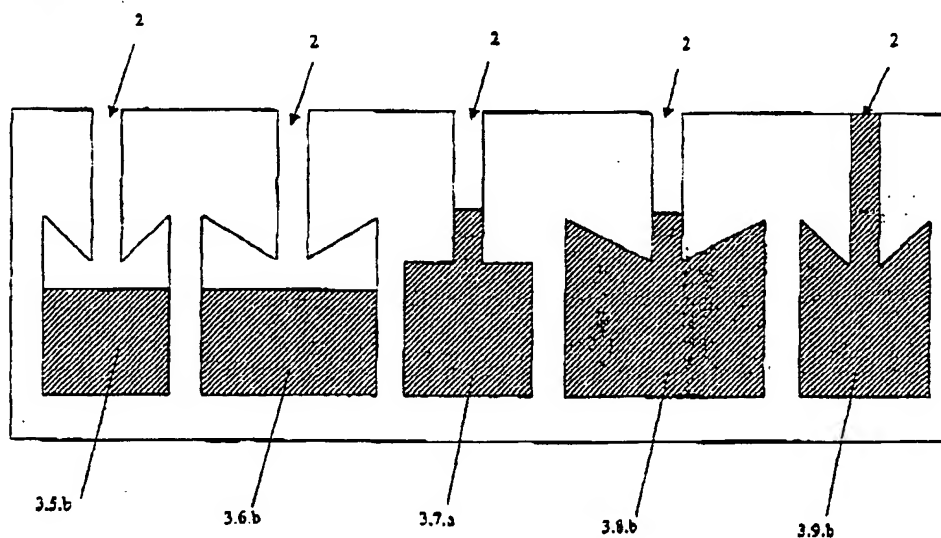

(57) Abstract: Acoustic construction element comprising sound insulating cavities having a constant shape along an axis parallel to the exposed surface of the construction element, at least part of said cavities comprising a first portion, situated closest to the external surface of the element, having a smaller width than the maximum width of a second, internal portion of the cavity, of which: - at least part of said cavities have different depths; - at least part of said cavities have different internal volumes and/or different internal shapes; - at least part of said cavities have a substantially constant width over their entire depth; - and at least part of said cavities are completely or partially filled with sound insulating material.

BEST AVAILABLE COPY